



VALVE-IN-HEAD FILTER HOUSINGS

- Ideal for a wide range of applications, including residential, commercial and industrial
- Available in 10" and 20" sizes
- Optional pressure-relief/bleed button on inlet side of cap
- Thick walls for increased strength
- Leak-proof sealing with top-seated Buna-N o-ring
- Available with clear and blue sumps

Valve-in-head (VIH) housings incorporate the same rugged design and application features as our Standard 3/4" NPT housings.

The internal valve-in-head allows both inlet and outlet ports to be simultaneously shut-off with a half turn of the handle. This eliminates the need for external shut-off valves. Radial sealing o-rings and sealing surfaces are continuously cleaned each time the valve is used, ensuring leak-proof operation.


Valve-in-head filter housings are available in both 10" and 20" lengths, will accommodate a wide range of 2 1/8" to 2 3/8" diameter cartridges and are available with either reinforced polypropylene or clear FDA-compliant Styrene-Acrylonitrile (SAN) sumps.



PENTEK
FILTRATION

Pure Quality.™

VALVE-IN-HEAD Filter Housings

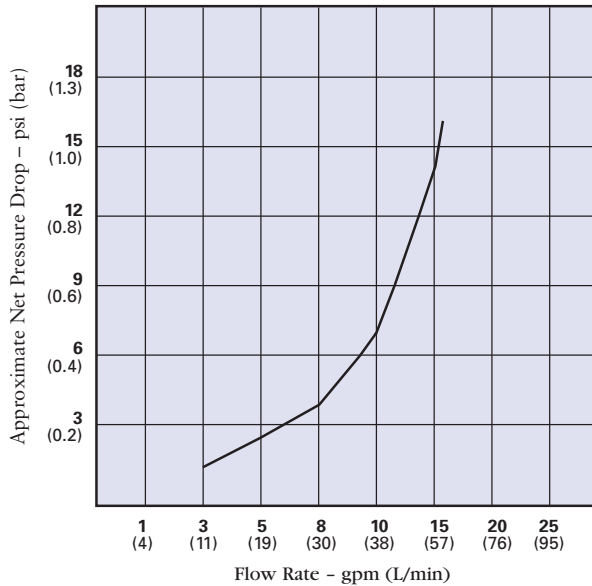

The 150164 and 150172 are Tested and Certified by NSF International to NSF/ANSI Standard 42 for material and structural integrity requirements only.

Housing Specifications and Performance Data

Model	Maximum Dimensions	Initial ΔP (psi) @ Flow Rate (gpm)
#10 VIH	12-1/2" x 5-1/8" (318 mm x 130 mm)	4 psi @ 8 gpm (0.3 bar @ 30 L/min)
#10 VIH Clear	12-7/8" x 5-1/4" (327 mm x 133 mm)	4 psi @ 8 gpm (0.3 bar @ 30 L/min)
#20 VIH	22-5/8" x 5-1/8" (575 mm x 130 mm)	4 psi @ 8 gpm (0.3 bar @ 30 L/min)

Materials of Construction

- **Housing** Polypropylene (Blue)
Styrene Acrylonitrile (Clear)
- **Cap** Reinforced Polypropylene
- **Button Assembly** 300-series Stainless Steel, EPDM and Polypropylene
- **Valve Parts** Delrin
- **O-Ring** Buna-N
- **Maximum Temperature** 125°F (51.7°C)
- **Maximum Pressure** 125 psi (8.62 bar)

CAUTION: Protect against freezing to prevent cracking of the filter and water leakage.



502 Indiana Avenue • P.O. Box 1047 • Sheboygan, Wisconsin 53082-1047
 Customer Service: 800-645-0267 • Fax: 888-203-7361 • supportspecialist@pentekfiltration.com
 International: 920-457-9435 • Fax: 920-457-2417 • international@pentekfiltration.com



Printed in U.S.A. 01/04 310052

