

FC40R Return Grille Filter

SPECIFICATION DATA



FEATURES

- Mounts in most third party return filter grilles.
- Provides high-efficiency alternative to one-inch filter.
- Captures particles as small as 0.3 micron.
- Pleated filter for greater media capacity.
- Easy installation. Pre-assembled filter easily inserts into and out of existing return grille.
- Exclusive frame design nests properly into place.
- Low pressure drop reduces strain on equipment, provides a comfortable air flow and maintains equipment efficiency longer than standard filters.

APPLICATION

The FC40R Return Grille Filter is a high-efficiency, long-life replacement for return grille applications. It captures a significant amount of the airborne particles in the air that circulate through the filter.

(Honeywell recommends allowing a depth of seven inches behind the grille to provide space for the deeper filter and airflow through the filter.)

SPECIFICATIONS

IMPORTANT

The specifications in this publication do not include normal manufacturing tolerances; therefore, this unit may not exactly match the listed specifications. Also, this product is tested and calibrated under closely controlled conditions, and some minor differences in performance can be expected if those conditions are changed.

FC40R Efficiency:

(Efficiency Ratings Based on ASHRAE Standard 52.2-1999.)
 14 x 24, 14 x 30, 18 x 24, 20 x 24, 20 x 30, 20 x 36, 24 x 30:
 Minimum Efficiency Reporting Value (MERV): 10 at 295 fpm.
 Initial Efficiency: 31% (0.3-1.0 micron particles).
 Initial Efficiency: 86% (3.0-10.0 micron particles).

12 x 12, 12 x 24, 14 x 14, 14 x 20, 14 x 25, 16 x 20, 16 x 25,
 20 x 20, 20 x 25, 24 x 24:
 Minimum Efficiency Reporting Value (MERV): 8 at 492 fpm.
 Initial Efficiency: 27% (0.3 -1.0 micron particles).
 Initial Efficiency: 78% (3.0 -10.0 micron particles).

Initial Pressure Drop:

0.12 in. wc at 295 fpm (tested 14 x 24 MERV 10 filter at 569 cfm).
 0.18 in. wc at 492 fpm (tested 20 x 20 MERV 8 filter at 1366 cfm).

Temperature Rating: -40° to 140°F (-40° to 60°C).

Approvals: Underwriters Laboratories, Inc: Listed to UL900, Class 2.

Accessories: W8600A AIRWATCH® Indicator (optional).



FC40R RETURN GRILLE FILTER

Replacement Schedule:

Replace filter every 12 months or more often if filter appears dirty enough to block airflow through heating/cooling system.

Typical Installations:

Installs easily in most brands of return filter grilles. See Fig. 1 for typical installation.

Dimensions: FC40R available in eleven sizes. See Fig. 2 and Table 1.

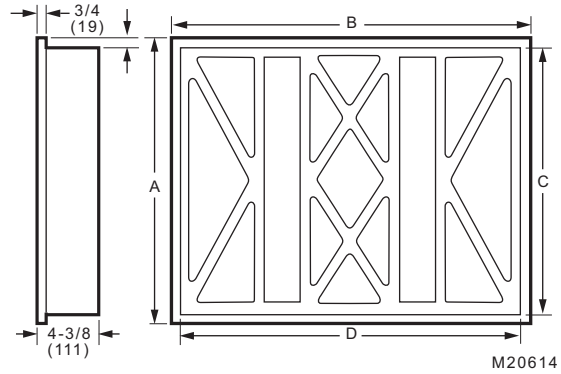


Fig. 2. Dimensions in in. (mm) (see Table 1).

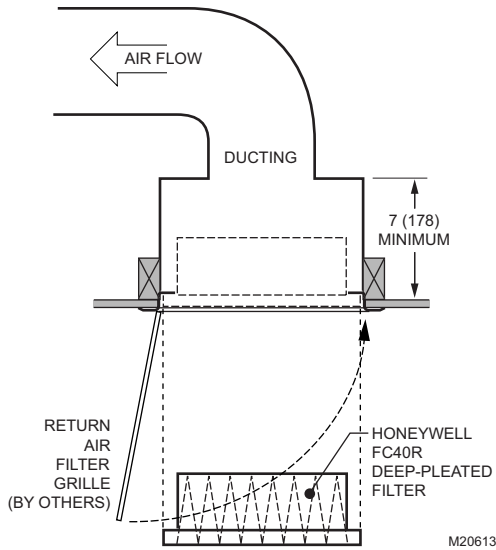


Fig. 1. Typical Ceiling Installation.

Table 1. FC40R Dimensions (See Fig. 2).

Model Number	Nominal Dimensions in in. (mm)	Dim A in in. (mm)	Dim B in in. (mm)	Dim C in in. (mm)	Dim D in in. (mm)
FC40R1003	20 X 20 (508 x 508)	19-3/4 (502)	19-3/4 (502)	18-1/2 (470)	18-1/2 (470)
FC40R1011	20 X 25 (508 x 635)	19-3/4 (502)	24-3/4 (629)	18-1/2 (470)	23-1/2 (597)
FC40R1029	20 X 30 (508 x 762)	19-3/4 (502)	29-3/4 (756)	18-1/2 (470)	28-1/2 (724)
FC40R1037	12 X 24 (305 X 610)	11-3/4 (298)	23-3/4 (603)	10-1/2 (266)	22-1/2 (571)
FC40R1045	14 x 25 (356 X 635)	13-3/4 (349)	24-3/4 (629)	12-1/2 (317)	23-1/2 (596)
FC40R1052	16 X 20 (406 X 508)	15-3/4 (400)	19-3/4 (502)	14-1/2 (368)	18-1/2 (470)
FC40R1060	16 X 25 (406 X 635)	15-3/4 (400)	24-3/4 (629)	14-1/2 (368)	23-1/2 (596)
FC40R1078	24 X 24 (610 X 610)	23-3/4 (603)	23-3/4 (603)	22-1/2 (571)	22-1/2 (571)
FC40R1094	12 X 12 (305 X 305)	11-3/4 (298)	11-3/4 (298)	10-1/2 (266)	10-1/2 (266)
FC40R1102	14 X 14 (356 X 356)	13-3/4 (349)	13-3/4 (349)	12-1/2 (317)	12-1/2 (317)
FC40R1110	14 X 20 (356 X 508)	13-3/4 (349)	19-3/4 (502)	10-1/2 (266)	18-1/2 (470)
FC40R1128	14 x 24 (356 x 610)	13-3/4 (349)	23-3/4 (603)	12-1/2 (317)	22-1/2 (571)

Table 1. FC40R Dimensions (See Fig. 2).

Model Number	Nominal Dimensions in in. (mm)	Dim A in in. (mm)	Dim B in in. (mm)	Dim C in in. (mm)	Dim D in in. (mm)
FC40R1136	18 X 24 (457 x 610)	17-3/4 (451)	23-3/4 (603)	16-1/2 (419)	22-1/2 (571)
FC40R1144	20 X 24 (508 x 610)	19-3/4 (502)	23-3/4 (603)	18-1/2 (470)	22-1/2 (571)
FC40R1151	20 X 36 (508 X 914)	19-3/4 (502)	35-3/4 (908)	18-1/2 (470)	34-1/2 (876)
FC40R1169	14 x 30 (356 X 762)	13-3/4 (349)	29-3/4 (756)	12-1/2 (317)	28-1/2 (724)
FC40R1177	24 X 30 (610 X 762)	23-3/4 (603)	29-3/4 (756)	22-1/2 (571)	28-1/2 (724)

FC40R RETURN GRILLE FILTER

Automation and Control Solutions

Honeywell International Inc.
1985 Douglas Drive North
Golden Valley, MN 55422
customer.honeywell.com

Honeywell Limited-Honeywell Limitée
35 Dynamic Drive
Scarborough, Ontario M1V 4Z9

© U.S. Registered Trademark
© 2005 Honeywell International Inc.
68-3062-4 G.H. Rev. 06-05



Printed in U.S.A. on recycled
paper containing at least 10%
post-consumer paper fibers.

Honeywell